



SILENCER
CENTRAL



BANISH 22K V2

BANISH® silencers are the original multi-caliber silencer and have been setting the standard for modular silencer design since 2009. As “the one that fits any gun,” BANISH silencers are more than just a multi-caliber silencer, they are also packed full of innovative design features that BANISH both sound and recoil.

At Silencer Central, our primary objective in silencer manufacturing has always been to create the most user-friendly product available. And what could be more user-friendly than a silencer that is both multi-caliber and user-serviceable? We take great pride in the achievements we've made, and we are excited to highlight what sets our BANISH silencer apart from the competition.

The foundation of our BANISH multi-caliber system lies in our exclusive WhisperTech™ tube, crafted from a lightweight titanium alloy. Designed to endure a lifetime of use, BANISH silencers combine lightweight construction with exceptional durability. By skillfully managing gas flow, the internal stacked baffles effectively reduce both recoil and noise levels. Additionally, our CanClean™ technology ensures that cleaning your silencer is a breeze.

WARNING



To provide for your safety and the effective use of this silencer, it is important that the owner and any user of the silencer read this entire manual and strictly follow the warnings and instructions within. This silencer should be used only by those who are well-versed in the safe operation of firearms.



Failure to follow installation and maintenance instructions in this manual may result in serious personal injury and damage to the firearm or silencer.



Suppressed firearms make less noise than unsuppressed firearms and it is easy to forget that they are still capable of causing bodily injury and property damage. Remember, a suppressed firearm should be treated with the same safety and caution as an unsuppressed firearm.



Before installing the silencer, be sure that the firearm is unloaded and the action is opened and visibly clear of any ammunition. If you are at all unsure as to the proper procedures to ensure that your firearm is unloaded, please consult your firearm user manual or contact a properly licensed dealer or the manufacturer of your firearm.



Firearm silencers are muzzle devices that users manually attach to their firearms. It's important to precisely follow the procedures outlined in the manual to avoid any issues with improper attachment.



Ensure the silencer is properly mounted to the firearm. The silencer mount should be fully seated against the barrel shoulder.



Ensure no crush washers are used when mounting - regardless of firearm/silencer as it can cause concentricity issues and potential baffle strikes.



If there is any gap, DO NOT fire the firearm with the silencer attached. Poor accuracy and product damage may result if the silencer is not seated against the thread shoulder.



Silencers must be free of obstructions such as mud, dirt, etc. DO NOT attempt to shoot through an obstructed silencer.



The silencer is designed to suppress the initial muzzle blast of the firearm. It does not negatively impact the bullet velocity.



A sonic crack may be produced by the projectile as it breaks the sound barrier. This is solely a function of the projectile breaking the sound barrier and is not related to product performance.



To ensure your silencer remains secure while firing, it is of the utmost importance that you frequently verify the silencer is securely tightened onto the barrel. We recommend after the first three discharges you tighten the silencer, and continue checking after every three discharges until the silencer stays tight. We then recommend checking the security of the attachment after 30 discharges of the firearm.



Before removing the silencer from the host firearm, be sure that the firearm is unloaded and the action is opened so that it is visibly clear of any ammunition. When removing the silencer, use extreme caution as it may be hot to the touch after firing. Silencers can reach temperatures over 1,000°F. Wait for your silencer to cool or use heat resistant gloves to avoid burns or other injuries. Be mindful of where you place a hot silencer.



Once the silencer is removed from the host firearm, Silencer Central recommends using a thread protector or other muzzle device on the firearm to protect the muzzle threads and crown during storage or transport.

PRODUCT SPECS



- CALIBER**
.22 LR*, .17 HMR, .22 Mag
- DIAMETER**
1"
- WEIGHT**
2.6 OZ
- LENGTH**
3-1/4"
- BAFFLES**
4
- MATERIAL**
100% Titanium
- 1/2 x 28 TPI - Direct Thread
- User-serviceable

Ruger 10/22 Sound Data 18.5" Barrel		
	dB Max Muzzle	dB Max Ear
Unsuppressed	142.9	136.6
BANISH 22K V2	121.1	121.6
dB Reduction:	21.8	15

**TESTING IN ACCORDANCE WITH MIL-STD-1474 USING BRUEL & KJAER PULSE NOISE EVALUATION SYSTEM TYPE 7963

CALIBER .22 (5.7 MM) AND SMALLER

POPULAR CARTRIDGES:



.17 HMR



.22 LR



.22 Magnum

PRODUCT OVERVIEW

The BANISH 22K V2 was designed for rimfire pistols and rifles chambered in .22 caliber and smaller (including .22 LR) which makes it ideal for varmint shooting, small game hunting or target practice.

The BANISH 22K V2 has four stacked baffles which makes them easy to assemble, while keeping lead debris and carbon from fusing the baffles together and helping prevent this buildup from reaching the tube.

The BANISH 22K V2 mounts on conventional 1/2 X 28 (Class 3A) threads .400" in length.



Note: .22 long rifle projectiles are not jacketed. As a result, lead can build up along with carbon produced by the burning of the powder.

Cleaning is recommended every 100 - 200 rounds to avoid having the baffles fuse together. If the lead and carbon get around the baffles (building up on the inside of the tube), it can prevent disassembly altogether. This will result in the baffles not being able to slide out past the buildup.

General Information

Ammunition: We recommend using good quality factory-new ammunition in your firearm as the ammunition you use has a huge influence on your suppressor functions.

Solvents and Lead Exposure: While handling a firearm, exposure to toxic materials may occur. Be sure to take precautionary measures on a regular basis to reduce your risk. Washing of hands and exposed skin is a good practice. Solvents and lead can cause a variety of short and long-term health issues.

Concentricity: To reduce the risk of a baffle strike it is important to ensure that your barrel threads are aligned concentrically with the bore axis of your firearm's barrel. If you are unable to verify this, it is strongly recommended that you have a reputable gunsmith verify it for you.

INSTALLATION OF SILENCER

Always ensure the firearm is unloaded when attaching or removing silencer.

Remove the magazine from the firearm, retract the bolt or slide and lock it open.

Visually and physically inspect the chamber to ensure the firearm is empty and unloaded. Engage the safety.

Ensure the threads on the barrel and silencer are clean and undamaged, screw the silencer onto the barrel threads until the silencer firmly seats against shoulder. Should screw on with minium resistance (Illustration #1).



Take special care to avoid cross-threading as damage to the silencer and barrel threads will result, as well as misalignment of the silencer with the bore of the firearm.

This may result in a potential baffle strike that could cause serious personal injury and damage to both the firearm and silencer.

Since silencers may loosen or unscrew during firing, it is extremely important that the operator frequently checks that the silencer remains securely threaded to the barrel.

Please note: the silencer will be very hot during and after firing. Wait until the silencer cools or use a heat resistant glove to protect from burns while retightening. Silencers can reach temperatures over 1,000°F.

Hand tighten only. Ready for use.

To remove the silencer, turn the barrel counter-clockwise until the silencer disconnects (Illustration #2). The silencer can only go on one way and come off one way.



Watch: How To Attach A Silencer

<https://go.silencercentral.com/AttachASilencer>



DISASSEMBLY AND CLEANING

It is recommended that the silencer be cleaned regularly. To disassemble, make sure the firearm is unloaded and remove from firearm.

Remove the muzzle cap end only (hex feature) using an adjustable wrench. The breech cap is not designed to be removed for cleaning.

Soak the inside of the tube and baffles with a penetrating oil and let sit for 1 - 2 hours. If excessive fouling has occurred, our [Baffle Removal-Tool \(sold separately\)](#) can be used to push the baffles out. Care must be taken to avoid damage to the baffles.

Scrub the baffles and tube with a nylon brush to remove carbon deposits. Once all parts are clean and dry, add a light film of oil on the baffles, to aid in assembly.




ASSEMBLY

Apply a small amount of grease or anti-seize to the threads inside the tube.

Reinstall the baffles into the tube placing the end baffle (as indicated in the diagram below) also referenced as the shortest baffle last. Each baffle has a faint line etched on the side to aid in alignment.

Reinstall the muzzle cap hand tight with the provided key tool.

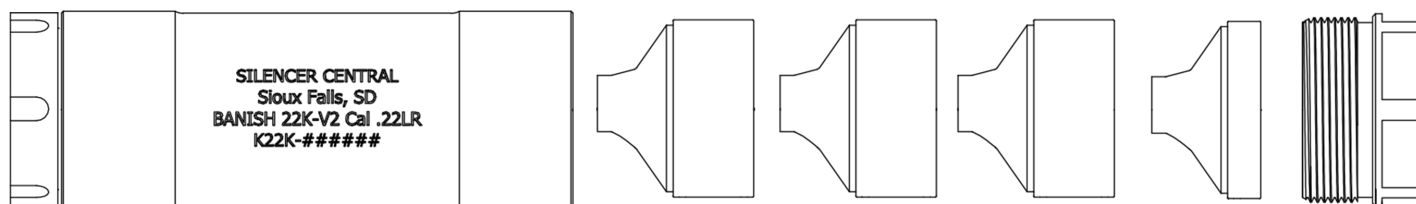

Watch: How To Breakdown & Clean Your Silencer

<https://go.silencercentral.com/BreakdownandClean22>





BANISH GUARANTEE

If your BANISH® Silencer doesn't significantly reduce the noise of your firearm, as well as recoil, we'll buy it back within 30 days of your ATF approval. If performance concerns are noted, you can send your BANISH Silencer back to be reviewed on a case-by-case basis. We will field test your BANISH Silencer and provide documentation of actual noise reduction and/or recoil results to satisfy our commitment to performance satisfaction. Additionally, we guarantee the quality and craftsmanship of your BANISH Silencer. After you are approved and you receive your BANISH Silencer, you may return your BANISH Silencer to Silencer Central for a full refund in the form of a Silencer Central e-gift card (tax stamp not included). All returns must be within 30 days of delivery signature.

The following terms and conditions apply:

- ✓ This offer only applies after the Form 4 is approved by the ATF. BANISH Silencer orders cannot be canceled or refunded while the Form 4 is pending.
- ✓ Tax stamp payments will not be refunded.
- ✓ The value of any promotional items earned as part of the original purchase will be deducted from the refunded amount.
- ✓ To process a return, you must first contact Silencer Central to receive a return authorization number and begin the Form 4 submission process to transfer the BANISH Silencer back. At that time, you will receive instructions on how and when to return the BANISH Silencer. Following these instructions is required.
- ✓ ATF approval is required before the BANISH Silencer can be returned to Silencer Central. Silencer Central is not responsible for any delays caused by the ATF.
- ✓ The refund will be given once Silencer Central receives said BANISH Silencer back into our NFA inventory.
- ✓ To receive a full refund, all respective accessories, cases, manuals, and original packaging must accompany your returned BANISH Silencer. Your original approved Form 4 is also required.
- ✓ All refunds will be in the form of a Silencer Central Gift Certificate, which is transferrable but not redeemable for cash.
- ✓ Please Note: Silencer Central reserves the right, in Silencer Central's sole discretion, to modify this guarantee at any time and without notice. Moreover, Silencer Central reserves the right to refuse specific cases deemed fraudulent, in Silencer Central's sole determination.

BANISH SILENCER LIFETIME WARRANTY

Silencer Central provides a lifetime warranty against all manufacturing defects and damage caused by the normal use of our products. We will repair or replace free of charge any silencer manufactured by, or at the direction of, Silencer Central. The product is sold “as is” with no further implied contractual rights or warranties beyond those expressly stated herein.

The lifetime warranty does not apply to certain conditions or acts. It is at the sole discretion and determination of Silencer Central if a defect or condition is covered by this warranty. Conditions not covered include, but are not limited to: modifications, abuse, neglect, use of defective ammunition, use of improperly sized ammunition, and criminal conduct. Silencer Central assumes no liability for damages or bodily injury caused by such acts or omissions as previously described. Abuse and neglect are defined as usage outside of the reasonable scope for which the product is intended, thus contributing to the accelerated and unreasonable premature wear of the silencer itself.

For warranty repair or replacement requests, please contact customer service at customerservice@silencercentral.com or 877.781.8778.



RETURN SHIPPING

The cost of shipping for any items returned to Silencer Central is the responsibility of the customer, with the exception of warranty claim returns. Return shipping to Silencer Central for warranty claims and/or repairs are covered by Silencer Central as long as Customer Service is contacted in advance and a warranty claim form is completed by the customer.

CHANGES TO OUR WARRANTY

You can review the most current version of our policies at any time at www.silencercentral.com. We reserve the right, at our sole discretion, to update, change or replace any part of these policies and Agreement by posting updates and changes to our site. It is your responsibility to check our website periodically for changes. This Warranty was last updated January 1, 2024.

CONTACTING US

If there are any questions regarding our policies, you may contact us using the information below:

BMADDOX ENTERPRISES LLC

DBA Silencer Central

4901 N 4th Ave.

Sioux Falls, SD 57104 USA

customerservice@silencercentral.com

888-781-8778